
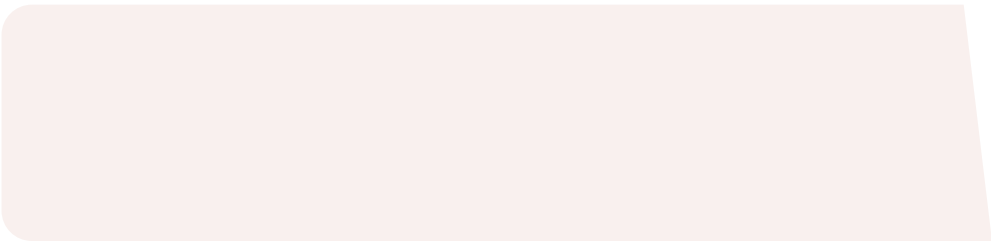


40

CNAS

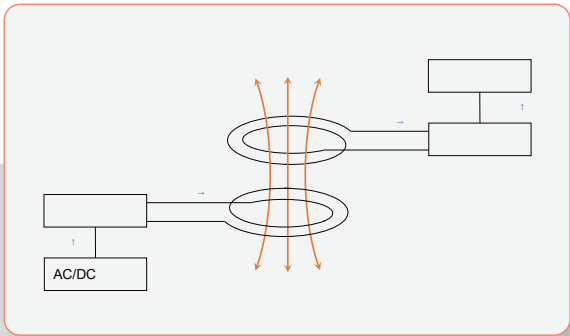

|  |       |      |     |
|--|-------|------|-----|
|  | 68kHz | 180V | 10A |
|  | 95%   |      |     |

U

kHz-

kHz

PW

CT

A



PW

± 0.05

8

2

1

HIOKI

U7005

. %

1000 V ± 2000 V peak

0.1Hz~5MHz

CT A

AC/DC 800A

: DC

4 MHz

DC ± 0.030% rdg. ± 0.009% f.s. 45 Hz ≤ f ≤ 65 Hz ± 0.025% rdg. ± 0.009% f.s. , ± 0.08°

PW8001

U7005

± . % 2

1

U7001


U7005

2

± (% of reading

% of range)

range

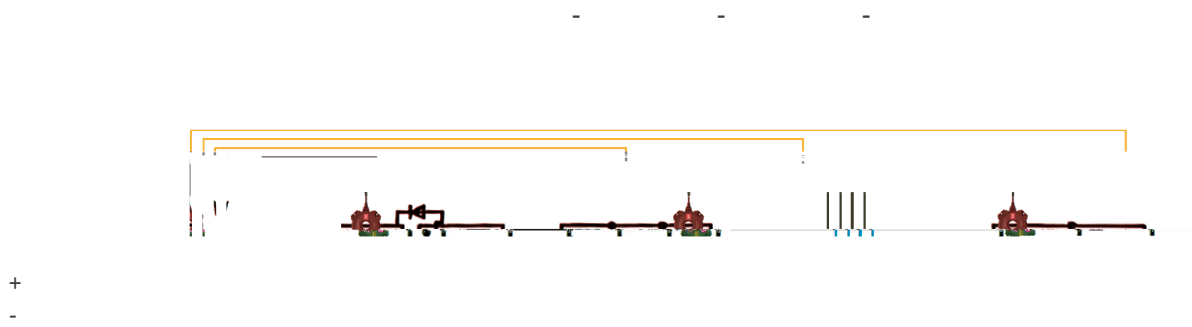


- kHz
- V
- A
- ≥ %

|                                                                                      |             |                   |             |
|--------------------------------------------------------------------------------------|-------------|-------------------|-------------|
| 2025/3/23 14:38:18 WideBand CH 1 Sync: U1 /U1 Auto 600 V Upper: 1000 V Lower: 100 Hz |             |                   |             |
| U <sub>rms1</sub>                                                                    | 31.3836 V   | U <sub>rms2</sub> | 183.472 V   |
| I <sub>rms1</sub>                                                                    | 8.4739 A    | I <sub>rms2</sub> | 8.2373 A    |
| P <sub>1</sub>                                                                       | 273.482 W   | P <sub>2</sub>    | 0.28123 kW  |
| f <sub>U2</sub>                                                                      | 69.0193 kHz | f <sub>I2</sub>   | 69.0193 kHz |
| θ <sub>I2</sub>                                                                      | -80.382 °   | η <sub>1</sub>    | 95.200 %    |
| U <sub>rms3</sub>                                                                    | 184.145 V   | θ <sub>I3</sub>   | -80.477 °   |
| I <sub>rms3</sub>                                                                    | 8.8472 A    | η <sub>2</sub>    | 99.023 %    |
| LOSS <sub>1</sub>                                                                    | 2.16358 W   | CFF               |             |


\*



LR8450






LR8450

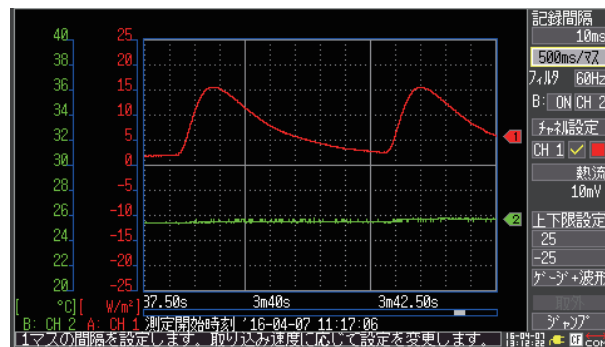

HIOKI PW8001 8  
15MS/s HIOKI

100kHz

( ± 0.057%)

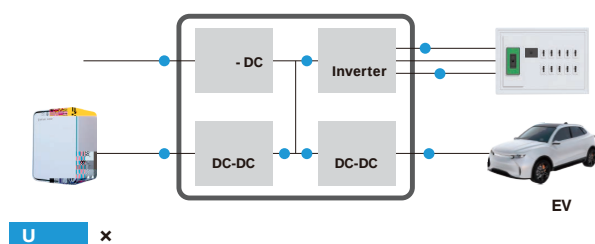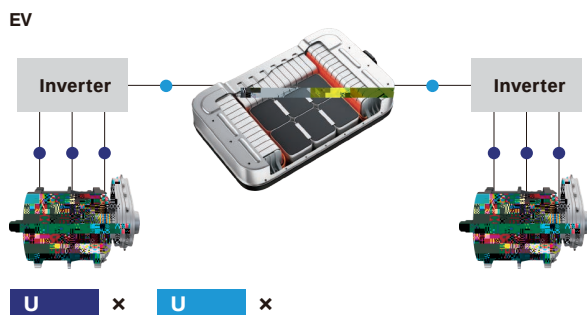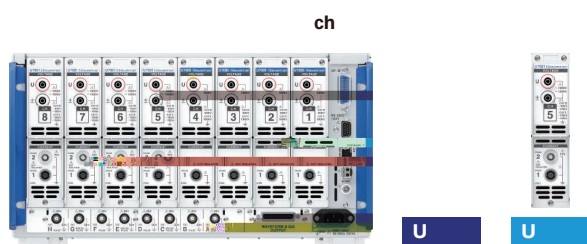

| 电流传感器的内部存储信息 |      |
|--------------|------|
| 传感器型号        | 额定电流 |
| 序列号          |      |

